


Sundance® Spas 880 Aspen®

Specifications

Dimensions:	89" x 110" x 40" (226 cm x 279.4 cm x 101.6 cm)
Seating Capacity:	7-8 Adults
Dry Weight:	1,240 lbs (562 kg)
Filled Weight (Spa Volume):	6,661 lbs (3,021 kg)
Filled Weight (Average Fill):	5,452 lbs (2,473 kg)
Water Capacity (Spa Volume):	650 US Gal (2,461 Liters)
Water Capacity (Average Fill):	505 US Gal (1,912 Liters)
Controls:	880 iTouch Interface LCD Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	3 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 3:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 4:	High-Output Dynamic Flow, 24-Hour programmable, factory default set to 8-Hour Filter/ Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
Total Hydrojets:	66
Seat A Jets:	2 Fluidix Nex, 8 Fluidix Reflex, 2 Accu-Pressure
Seat B Jets:	2 Fluidix Reflex, 1 Vortex
Seat C Jets:	1 Vortex
Seat D Jets:	4 Fluidix Nex, 12 Fluidix ST, 4 Focus Relief, 1 Whirlpool (sidewall), 2 Accu-Pressure
Seat E Jets:	2 Fluidix Reflex
Seat F Jets:	4 Fluidix Nex, 4 Fluidix Reflex, 1 Fluidix Intelli-Jet, 1 Fluidix PT, 2 Focus Relief, 2 Accu-Pressure
Seat G Jets:	2 Fluidix Nex, 2 Vortex, 2 Fluidix PT, 2 Focus Relief, 1 Whirlpool (sidewall), 2 Accu-Pressure
Air Blower:	High-efficiency, 1-Speed
Aromatherapy Delivery:	6 Silent Air® Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	7/2 (Standard air control with LED lights and massage selector with LED lights)
Filter:	MicroClean® Ultra II Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Dynamic Flow Circulation System; Factory installed CLEARARRAY Active Oxygen™ Water System
Lighting:	Multicolored Sunglow LED Lighting System (1 Waterfall, 2 Underwater, 7 Air controls, 2 Massage Selectors, 1 Backlit handrail, Exterior lighting)
Skirt Cabinet (SunSide™):	Windy Oak, Ironwood and Flint Gray
Shell Colors:	Platinum, Celestite (Gypsum), Monaco, Midnight, Porcelain
Handrails:	One High Quality Stainless Steel with backlit LED lighting
ComfortTone Headrests:	Four, 1-Piece Gray
Heater:	Hi Flow 5.5 kW With Titanium Element Export (50 Hz): Hi Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@50A or 60A; Export (50 Hz): 230-240 VAC@1x32A, 1x16A/1x20A, 3x16A (see manual for more configurations); or Suitable Rated Circuit Breaker To Comply With Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required For This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 2 premium speakers and a powered subwoofer
Special Features:	MicroClean® Plus Versatile Filter Lid, Optional (Factory Installed) SmartTub® Module, Optional Inductive Charger




*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice


Sundance Spas 880 Aspen

Operation/Seat Depths

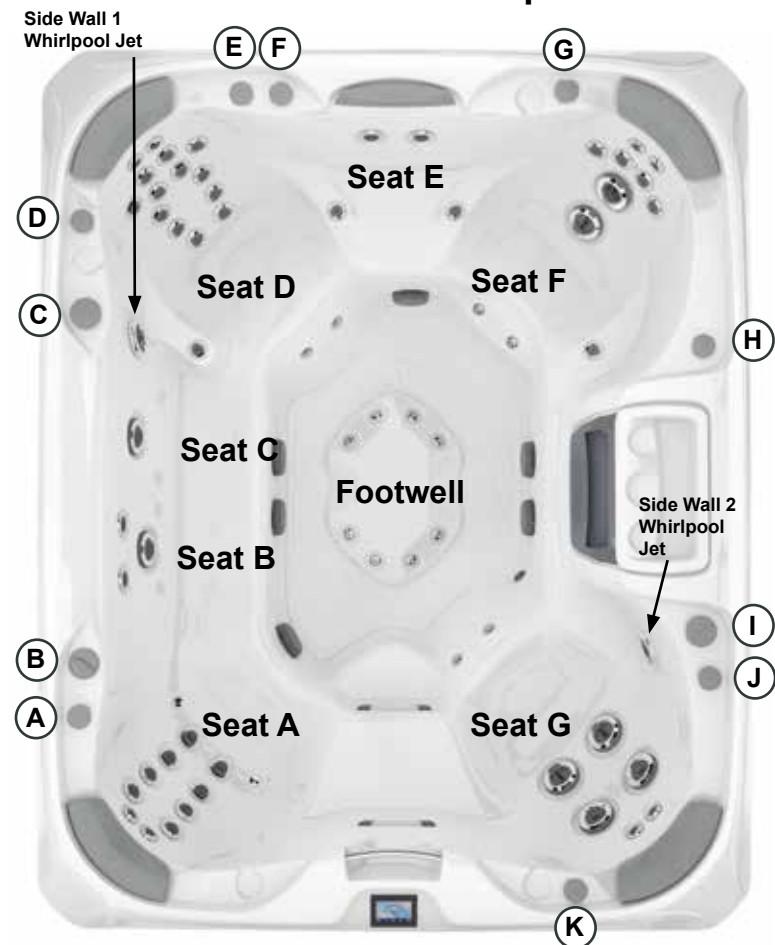

- (A)** Air Control - Activates Seat A Jets (2 Fluidix Nex, 8 Fluidix Reflex, 2 Accu-Pressure), Seat B Jets (2 Fluidix Reflex, 1 Vortex) and Seat C Jet (1 Vortex)
- (B)** SunScents Dispenser
- (C)** Massage Selector [Pump 2] - Adjusts Massage Level Between Seat D Jets and Seat G Jets
- (D)** Air Control - Activates Upper Seat D Jets (4 Fluidix Nex, 6 Fluidix-ST)
- (E)** Air Control - Activates Lower Seat D Jets (6 Fluidix-ST, 2 Accu-Pressure)
- (F)** Air Control - Activates Seat D Side Wall Whirlpool Jet
- (G)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (H)** Air Control - Activates Seat E (2 Fluidix Reflex) + Seat F Jets (4 Fluidix Nex, 2 Fluidix ST, 1 Fluidix Intelli-Jet, 1 Fluidix PT, 2 Accu-Pressure)
- (I)** Massage Selector [Pump 1] - Adjusts Massage Level Between Seat A Jets + Seat B Jets + Seat C Jets and Seat D Side Wall Whirlpool Jet + Seat G Side Wall Whirlpool Jet
- (J)** Air Control - Activates Seat G Side Wall 1 Whirlpool Jet
- (K)** Air Control - Activates Seat G Jets (2 Fluidix Nex, 2 Vortex, 2 Fluidix PT Jets, 2 Accu-Pressure)

66 Total Jets



- Jets Pump 3: Seat E Jets and Seat F Jets are always on when this pump is running


Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 26.00" (66.04 cm)
B = 26.00" (66.04 cm)
C = 26.00" (66.04 cm)
D = 28.00" (71.12 cm)
E = 19.00" (48.26 cm)
F = 26.00" (66.04 cm)

G = 26.00" (66.04 cm)
H = 18.00" (45.72 cm)
I = 35.00" (88.90 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**

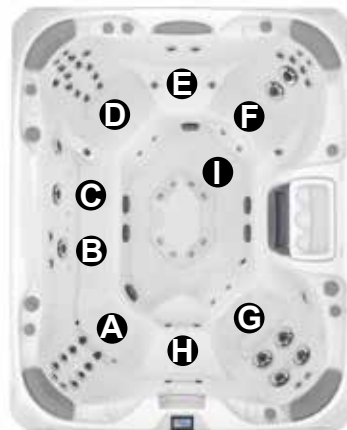


Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Aspen


Portable Dimensions

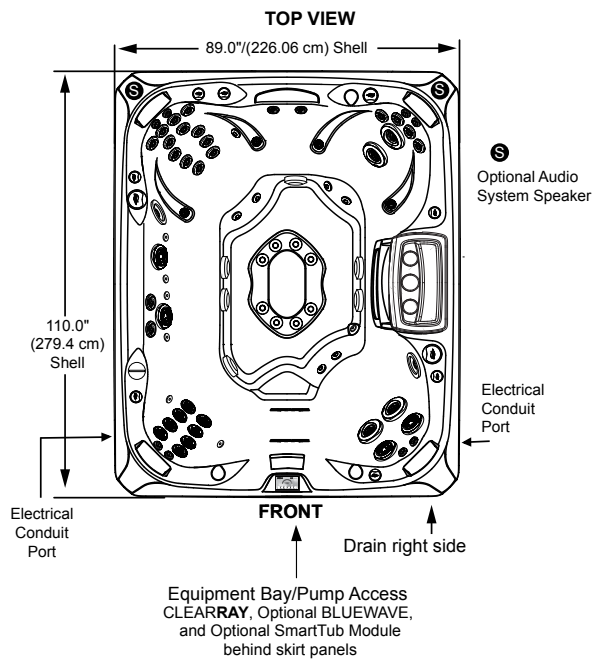

FRONT/BACK VIEW
Tolerance: $\pm 0.5"$ (1.27 cm)

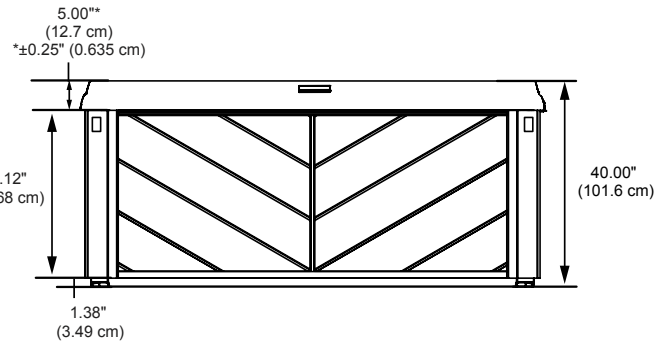


SIDE VIEW
Tolerance: $\pm 0.5"$ (1.27 cm)

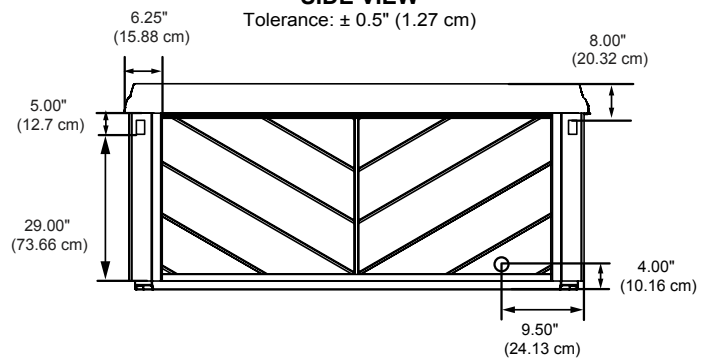

NOTE: Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

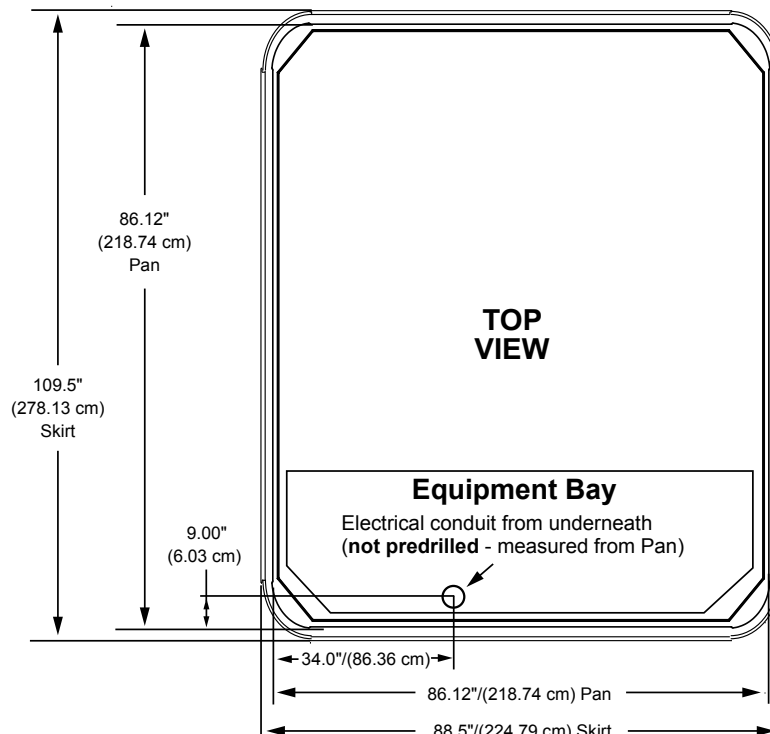

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice